



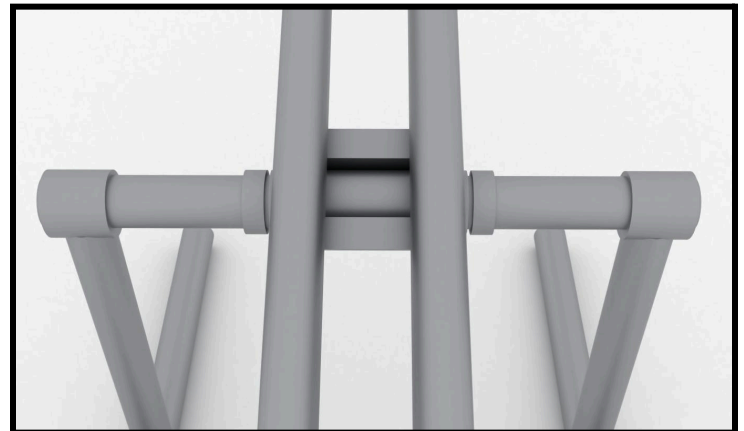

# Installation Instructions

## TTJR10-FS

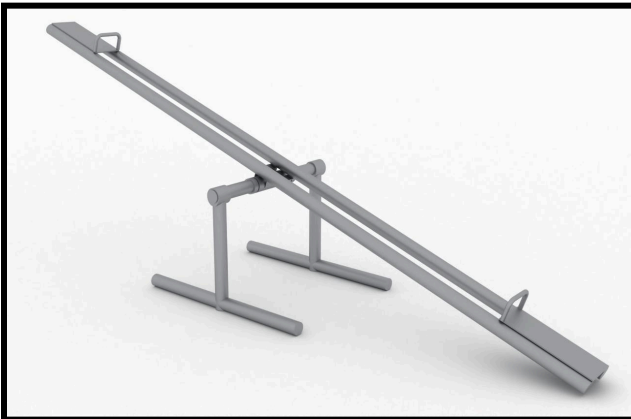

1. Slide the teeter totter onto the 30" x 2  $\frac{3}{8}$ " cross bar and center it.
2. Slide a retainer ring onto each end of the cross bar until they rest loosely against each side of the teeter totter. Secure each one with a  $\frac{3}{8}$ " x  $\frac{3}{8}$ " set screw. Tighten as hard as you can, but do not use power tools for this.
3. Slide a freestanding leg onto each end of the cross bar, just until it is flush. Secure each leg with two  $\frac{3}{8}$ " x  $\frac{3}{8}$ " set screws. Tighten as hard as you can, but do not use power tools for this.